


Handheld LF RFID Reader

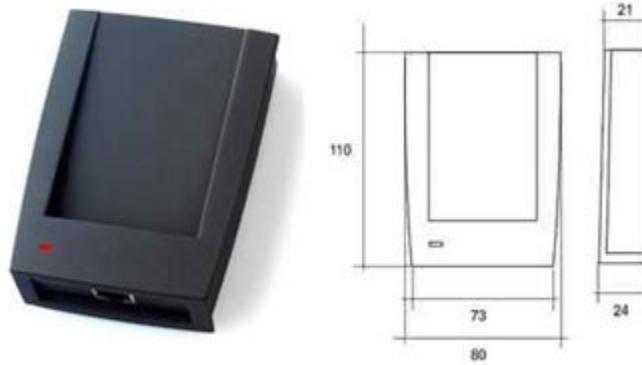

SPECIFICATIONS:

Working frequency	125KHz
Reading or writing standard charts	EM4001,Hitag-1,Hitag-2,Hitag-s
Reading range	up to 5-8 cm
Dining	USB
Audio / light indication	signal lamps, two-LED
Operating Temperature	-30° C to +40 °C
Body material	ABS plastic
The output interfaces	USB
Size (mm)	110 * 80 * 24